
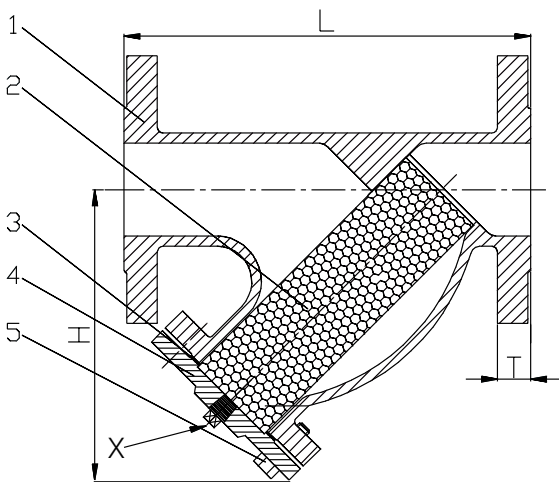


PN16 Cast Iron "Y" Strainer

Features

- Flanged BS EN 1092-2 PN16
- Body, Bonnet: Cast Iron
- Screen: AISI 304
- Drain Plug on the Bonnet

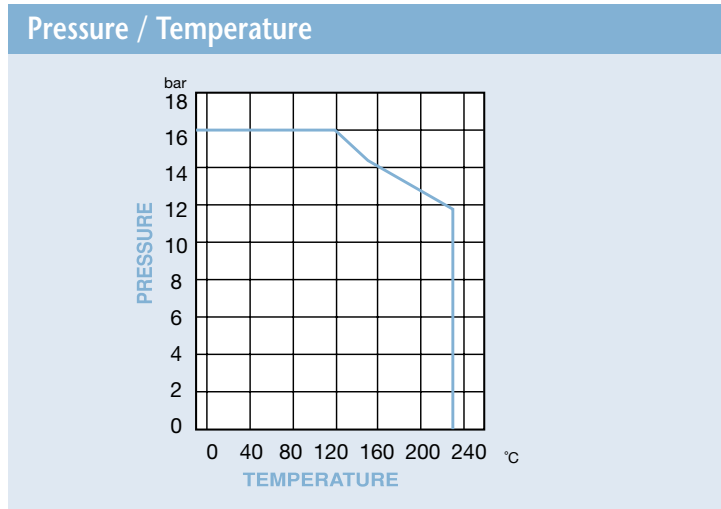

N.	Part Name	Materials
1	Body	ASTM A126 B GG25
2	Screen	Stainless Steel 304
3	Gasket	Non-Asbestos
4	Cover	ASTM A126 B GG25
5	Nut	ASTM A194 2H

DN	50	65	80	100	125	150	200	250	300
H	166	190	162	181	248	282	350	490	550
L	230	290	310	350	400	480	600	730	850
T	20	20	22	22	24	24	26	32	32
X	1/2"NPT	1"NPT	1"NPT	1 1/4"NPT	1 1/4"NPT	1 1/2"NPT	1 1/2"NPT	2"NPT	2"NPT
Mesh	1.5mm	1.5mm	1.5mm	1.5mm	1.5mm	1.5mm	1.5mm	1.5mm	1.5mm
Kgs	11.5	16	16	23.5	33	46	77	138	190

Technical Data	
Maximum Pressure	16 Bar
Working Temperature	-10°C to +230°C

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.