


N.	Part Name
1	Lock Nut
2	Washer
3	Coil
4	Tube Guide
5	Spring
6	Plunger
7	Spring
8	Screw
9	Split Washer
10	Valve Body Top
11	Spring
12	Spring
13	Piston Rings
14	Piston
15	Gasket
16	Bush
17	Valve Body Base

## Solenoid Valve Pilot Operated 2/2 Way Normally Closed

### Features

- Media - Steam
- Seal: PTFE Piston
- Body: Nickel Plated Brass
- Pressure Min 1 Bar Max 10 Bar

### Pressure / Flow Rate

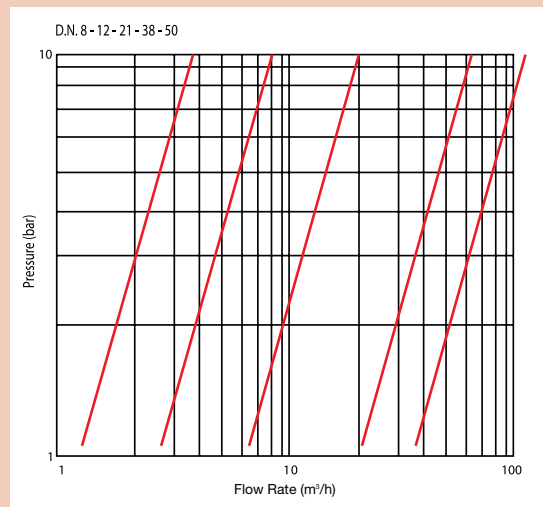

Coil Options			
Voltage	Power		50, 60 Hz
	Holding	in Rush	
V~ 12, 24, 48, 110, 230, 400	20va	38va	
V= 12, 24, 48, 110	14w		

DN	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	73	73	100	100	146	146	174
B	118	118	134	139	184	184	219
C	48	48	80	80	128	128	146
D	105.5	105.5	116	119	154	154	184
Kgs	0.75	0.73	1.45	1.48	4.50	4.30	7.20

### Technical Data

Pressure Range	1 bar to 10 bar ac, 1 bar to 5 bar dc
Working Temperature	-40°C to +180°C